

## Instrumentation Cable Multipair Overall Screened


### Product Description

Multi Pair, Plain Annealed Copper Conductors, PVC Insulated, Overall Screened with an Aluminium/Polyester Laminated Tape with a Tinned Annealed Copper Drain Wire, PVC Sheathed, UV resistant, Instrumentation Cable.


### Specifications

<b>Conductor</b>	
Material:	Plain Annealed Copper
Stranding:	Class 2
Standards:	AS/NZS 1125
<b>Insulation</b>	
Material:	PVC (300V rated)
Operating Temperature:	75°C
Colour:	Black with white numbered cores White with black numbered cores
Standards:	AS/NZS 3808
<b>Sheath</b>	
Material:	PVC
Operating Temperature:	-15°C - 75°C
AS/NZS Material Designation:	5V-90
Colour(s):	Black (UV resistant), Grey, Blue
Standards:	AS/NZS 3808
<b>Packaging</b>	Timber Drum – 100mtr or 500mtr Plastic Drum for short lengths, usually less than 50mtrs

\*MOQ may apply

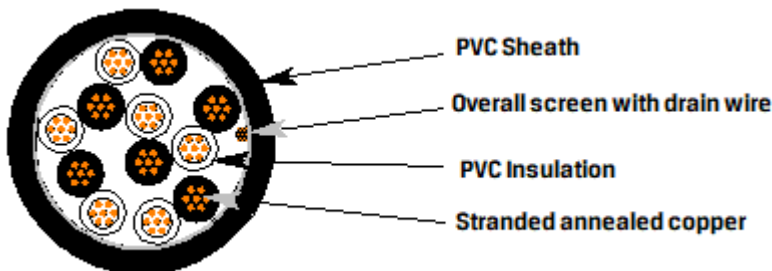

**Product Images**

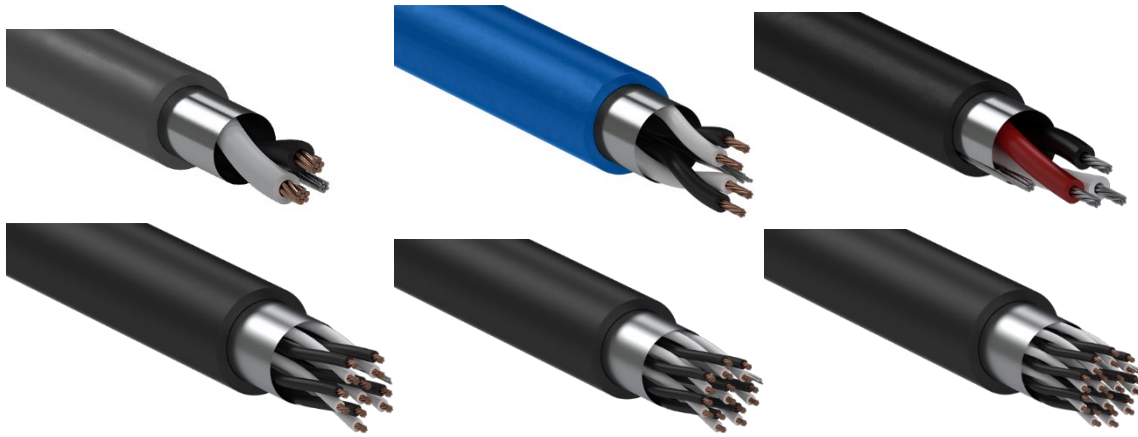

**Product Details**

Part No.	Colours	No. Of Pairs	Nom. Area mm <sup>2</sup>	Stranding No./mm	Cable O.D. mm	Approx Mass kg/km
ELT7301P	Black, Grey, Blue	1	0.5	7/0.30	5.3	31
ELT7302P	Black, Grey, Blue	2	0.5	7/0.30	7.5	56
ELT7303	Black, Grey	3 Core	0.5	7/0.30	5.8	39
ELT7303P	Black, Grey	3	0.5	7/0.30	8.3	73
ELT7304P	Black	4	0.5	7/0.30	9.8	93
ELT7306P	Black	6	0.5	7/0.30	11.6	130
ELT7308P	Black	8	0.5	7/0.30	12.8	174
ELT7310P	Black	10	0.5	7/0.30	15.0	217
ELT7312P	Black	12	0.5	7/0.30	15.8	248
ELT7320P	Black	20	0.5	7/0.30	19.0	412
ELT7401P	Black	1	0.88 (1.0)	7/0.40	6.0	43
ELT7402P	Black	2	0.88 (1.0)	7/0.40	8.7	78
ELT7403P	Black	3	0.88 (1.0)	7/0.40	10.0	107
ELT7404P	Black	4	0.88 (1.0)	7/0.40	10.8	133
ELT7501P	Black, Grey, Blue	1	1.5	7/0.50	7.0	55
ELT7502P	Black	2	1.5	7/0.50	10.8	107
ELT7503P	Black	3	1.5	7/0.50	11.7	147
ELT7504P	Black	4	1.5	7/0.50	13.5	190

**Certifications**



**BEP Certificate number:** BEP-AMI 78008

Subject to change without notice