


Data Cable Multipair Overall Screened - PVC

Product Description

Multi Pair, Tinned Copper Conductors, PVC Insulated, Overall Screened with an Aluminium/Polyester Laminated Tape with an Annealed Copper Drain Wire, PVC Sheathed Data Cable

Specifications

Conductor	
Material:	Tinned Copper
Stranding:	Class 2
Standards:	AS/NZS 1125
Insulation	
Material:	PE
Operating Temperature:	70°C
Colour(s):	1 Pair: (blue, blue/white) 2 Pair: (blue, blue/white), (orange, orange/white) 3 Pair: (blue, blue/white), (orange, orange/white), (green, green/white) 4 Pair: (blue, blue/white), (orange, orange/white), (green, green/white), (brown, brown/white) 6 Pair: (blue, blue/white), (orange, orange/white), (green, green/white), (brown, brown/white), (grey, grey/white), (red, blue).
Standards:	AS/NZS 3808
Sheath	
Material:	PVC
Operating Temperature:	90°C
AS/NZS Material Designation:	5V-90
Colour(s):	Grey, Black, Pink
Standards:	AS/NZS 3808
Dielectric strength at 20° DC	1kV/1min
Nominal Voltage	110V AC

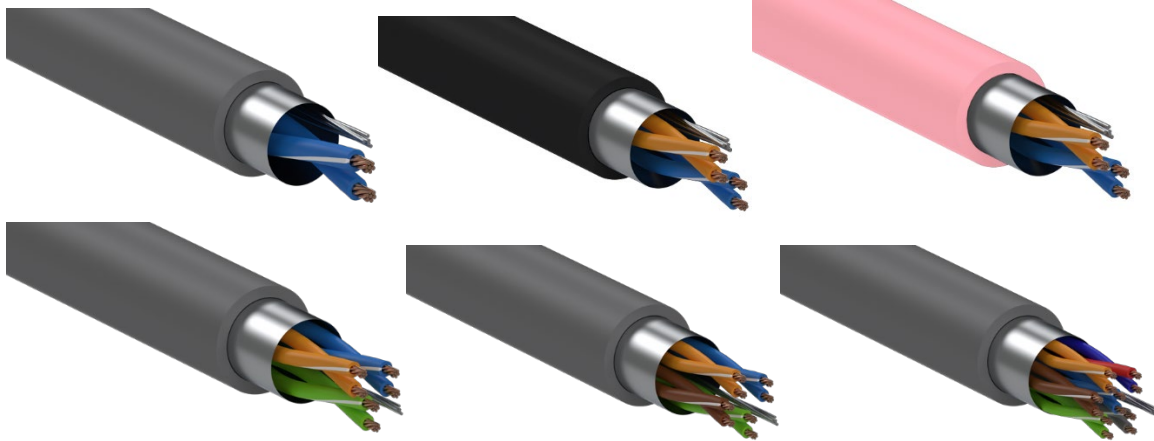

Part No.	Colours	No. Of Pairs	Nom. Area mm ²	Cable O.D. mm	Stranding No./mm	Approx Mass kg/km
ELT7201P	Grey	1	0.22	4.4	7/0.20	16
ELT7202P	Grey, Black, Pink	2	0.22	6.0	7/0.20	25
ELT7203P	Grey	3	0.22	6.5	7/0.20	31
ELT7204P	Grey	4	0.22	7.0	7/0.20	38
ELT7206P	Grey	6	0.22	8.8	7/0.20	62

Certifications



BEP Certificate number: BEP-AMI 78008

Subject to change without notice