

## Control Cables Unscreened - No Earth


### Product Description

Multicore, Stranded Plain Annealed Copper, 300/500V PVC Insulated (V-75), Laid Up PVC Sheathed Multicore Control Cable. Standards & compliance generally to VDE 0250.

### Specifications

<b>Conductor</b>	
Material:	Plain Annealed Copper
Stranding:	Class 5
Standards:	AS/NZS 1125
<b>Insulation</b>	
Material:	PVC
Operating Temperature:	75°C
Colour:	Black with white numerals
Standards:	AS/NZS 3808
<b>Sheath</b>	
Material:	PVC
Operating Temperature:	75°C
AS/NZS Material Designation:	4V-75
Colour:	Grey
Standards:	AS/NZS 3808
<b>Packaging</b>	Usually Timber Drum - Length as ordered* Plastic Drum for short lengths, usually less than 50mtrs

\*MOQ may apply

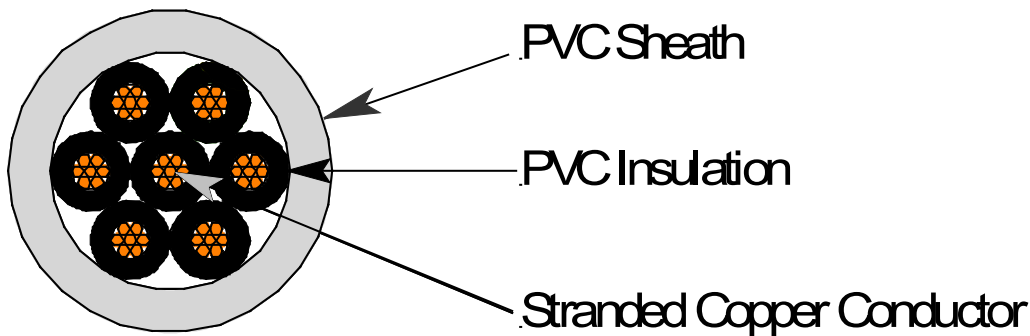

Part No.	No. Of Cores	Stranding No./mm	Nom. Area mm <sup>2</sup>	Cable O.D. mm	Approx Mass kg/km
CC002NE	2	16/0.20	0.5	5.2	45
CC003NE	3	16/0.20	0.5	5.5	52
CC004NE	4	16/0.20	0.5	6.0	67
CC102NE	2	24/0.20	0.75	5.6	56
CC103NE	3	24/0.20	0.75	6.1	67
CC104NE	4	24/0.20	0.75	6.6	82
CC202NE	2	32/0.20	1.0	6.0	64
CC203NE	3	32/0.20	1.0	6.5	78
CC204NE	4	32/0.20	1.0	7.0	96
CC303NE	3	30/0.25	1.5	7.1	110
CC304NE	4	30/0.25	1.5	7.7	136

**Certifications**



**BEP Certificate number:** BEP-AMI 78008

Subject to change without notice