


## Building Wire

### Product Description

Single Core Rated at 0.6/1kV, Plain Annealed Copper Conductors, PVC Insulated to Australian Standards AS/NZS 5000.1.

### Specifications

<b>Conductor</b>	
Material:	Plain Annealed Copper
Stranding:	Class 2
Standards:	AS/NZS 1125
<b>Insulation</b>	
Material:	PVC (V90-HT)
Operating Temperature:	-15°C - 75°C
Colour:	As ordered
Standards:	AS/NZS 3808
<b>Packaging</b>	Plastic Reel – 100mtr – 0.5mm <sup>2</sup> to 10mm <sup>2</sup> conductor Timber Drum – 100mtr – 16mm <sup>2</sup> to 35mm <sup>2</sup> conductor Cable can be cut to length* from 10mm <sup>2</sup> conductor upwards

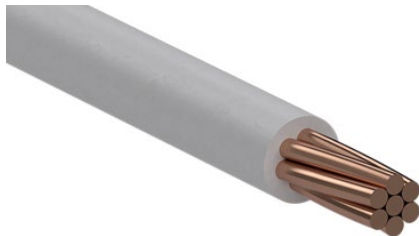

Part No.	Nom. Area mm <sup>2</sup>	Cable O.D. mm	Approx Mass kg/km
BW7050	1.5	3.3	22
BW7067	2.5	3.7	35

### Certifications



**BEP Certificate number:** BEP-AMI 78008

Subject to change without notice