

## PVC Slotted Duct – Narrow

### Specifications

- Material: Technopolymer on rigid PVC base, self-extinguishing V0 (UL94)
- Colour: Grey RAL7030
- Narrow slots
- Length: 2 meters
- Resistance to mechanical shocks IK 07 (shocks up to 2 J)
- Resistance to heat in continuous use: up to 70°C
- Resistance to abnormal heat: up to 650°C (Glow Wire Test, Reference Standard IEC 60695-2-11)
- Installation temperature range: -5°C - 60°C
- Insulation resistance > 100MΩ
- Dielectric voltage: > 3.0V
- Perforated bottom according to Standard DIN 43659
- Made in Italy
- Manufacturer: Elettrocanali

### Features

- Double break line to remove only one slot or the whole trunking wall fast and easily
- High resistant to UV rays
- Rounded slot profile increases safety for operator and cables
- Supplied with lids

### Standards and Compliance

- EN 50085-1:2005 + A1:2013, EN 50085-2-3:2010, UL 1565 ED.4.
- Products meeting the safety objectives of Low Voltage Directive 2014/35/EU (Annex I)
- Compliant with RoHS II – 2011/65/EU directive + 2015/863/EU.

### Product Images and dimensions




**Product Details**


Part No.	Dimensions W x H (mm)	Box Qty
EC2525NSD	25 x 25	40
EC2540NSD	25 x 40	30
EC2560NSD	25 x 60	18
EC2580NSD	25 x 80	28
EC4040NSD	40 x 40	16
EC4060NSD	40 x 60	28
EC4080NSD	40 x 80	20
EC40100NSD	40 x 100	16
EC6060NSD	60 x 60	16
EC6080NSD	60 x 80	18
EC60100NSD	60 x 100	12
EC8060NSD	80 x 60	14
EC8080NSD	80 x 80	8
EC80100NSD	80 x 100	12
EC10080NSD	100 x 80	12
EC100100NSD	100 x 100	8

**Dimensions**


**25mm**

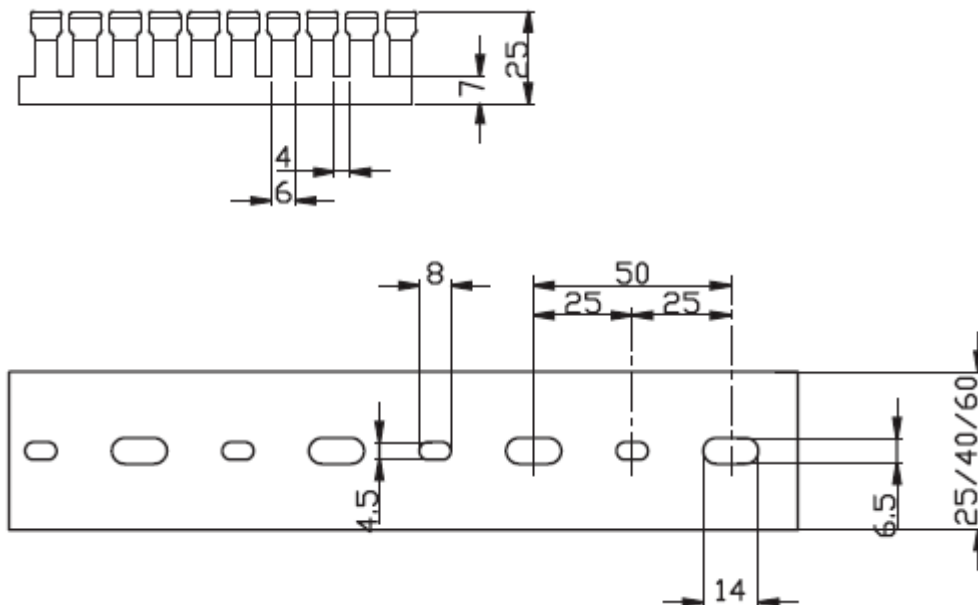



### 40mm

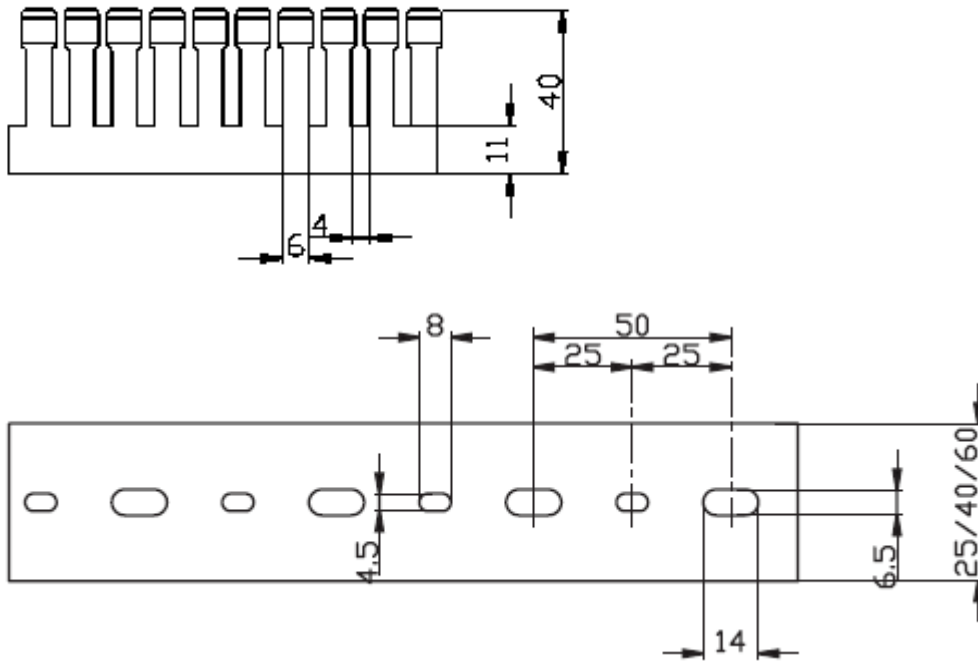



### 60mm

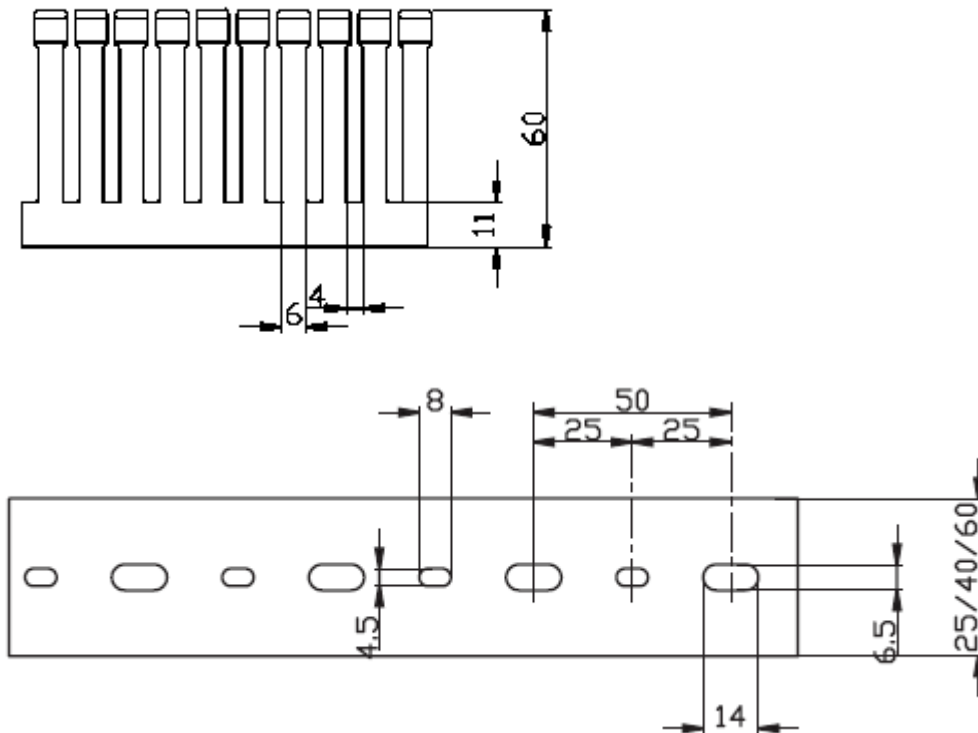

### 80mm

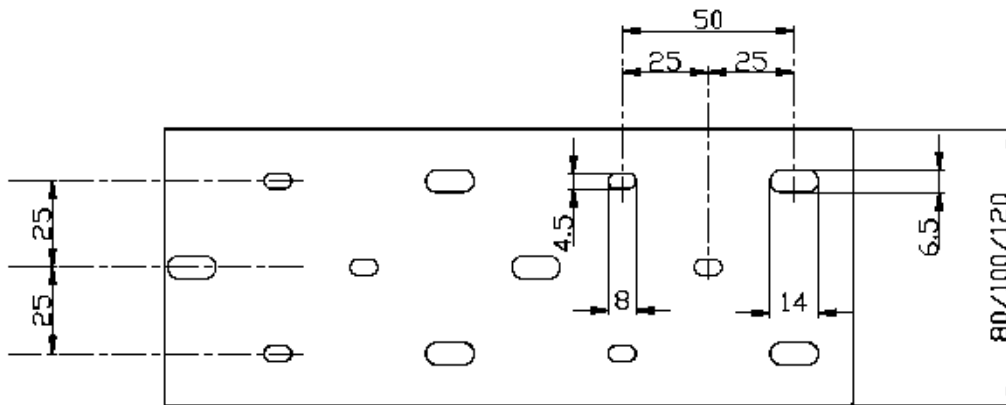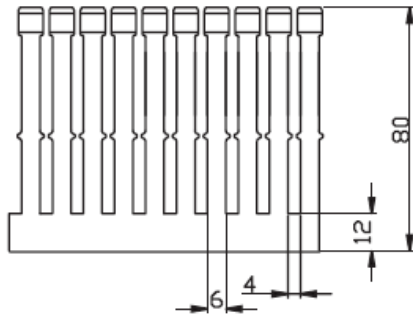

### 100mm

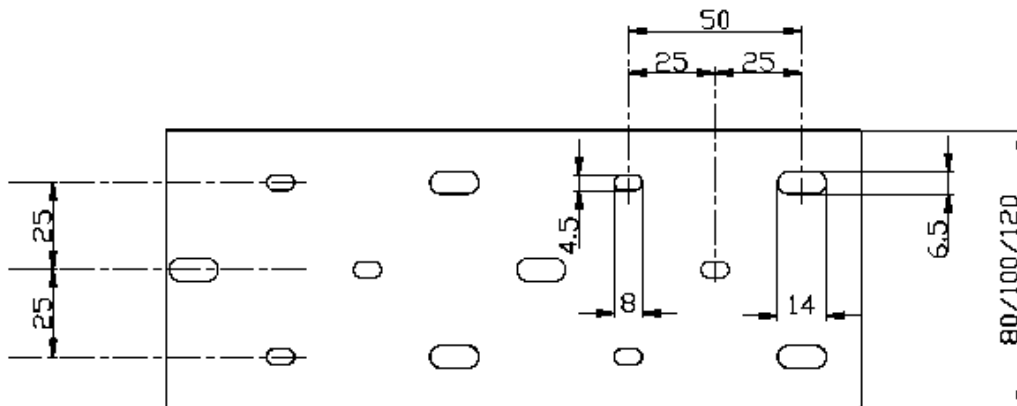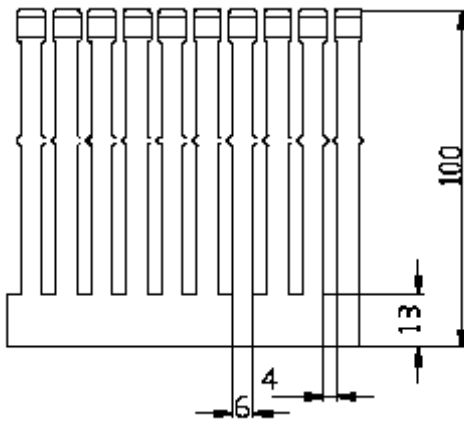

Subject to change without notice