

Degson Slide Disconnect Terminal – PC Series

Specifications

Screw type Din-Rail TB

Rated voltage: 400 V

Left/Right Hardware: Copper Alloy

Contact Hardware: Copper Alloy

Connection type: Screw/ Plug-in connection

Open-end side panels: Yes

Number of connections: 2

Number of potentials: 1

Number of positions: 1

Colour: Grey


Mounting type: NS 35/7.5, NS35/15

Insulation Materials: PA

End plate width: 2mm

Manufacturer: Degson

Product Images

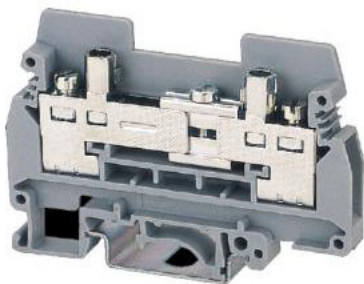

Product Advantages

- Screw connection technology, reliable connection
- Equipped with fixed parts and bridge parts, circuit connection test is more flexible
- Copper alloy material, good corrosion resistance
- The sliding block breaks, which can realize the circuit breaking function
- Can be matched with terminal marker strips to avoid incorrect insertion of wires

Product Certifications




Product Details

| Part No. | Rated Current | Cross Section | AWG | H (mm) | W (mm) | Length (mm) | NS 35/15 Height | NS 35/7.5 Height |
|----------|---------------|---------------|---------|--------|--------|-------------|-----------------|------------------|
| PCTK6 | 41A | 0.5mm² - 6mm² | 26 - 10 | 50.5 | 8.2 | 72 | 59.25 | 51.75 |

Product Dimensions

PCTK6

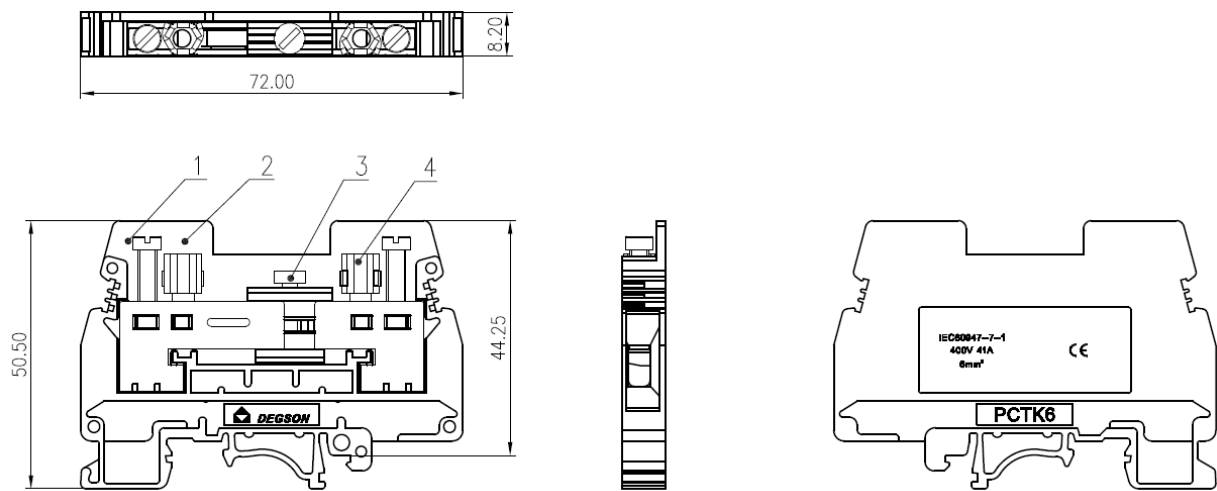

Subject to change without notice


Degson Slide Disconnect Link Bar – PC Series**Specifications**

Plug-in bridge

Current carrier: Copper

Screws: Copper Alloy


Number of potentials: 2

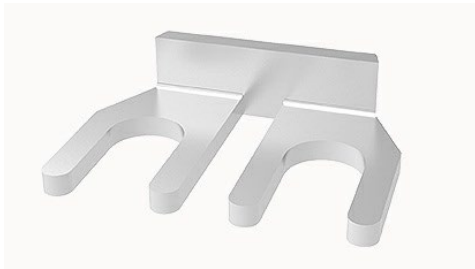Product images**Product advantages**

- Screw type bridge
- Flexible circuit connection can be realized

Product details

| Part No. | Pitch | Compatible Terminal |
|-----------|-------|---------------------|
| FB2-RTK/S | 8.2mm | PCTK6 |

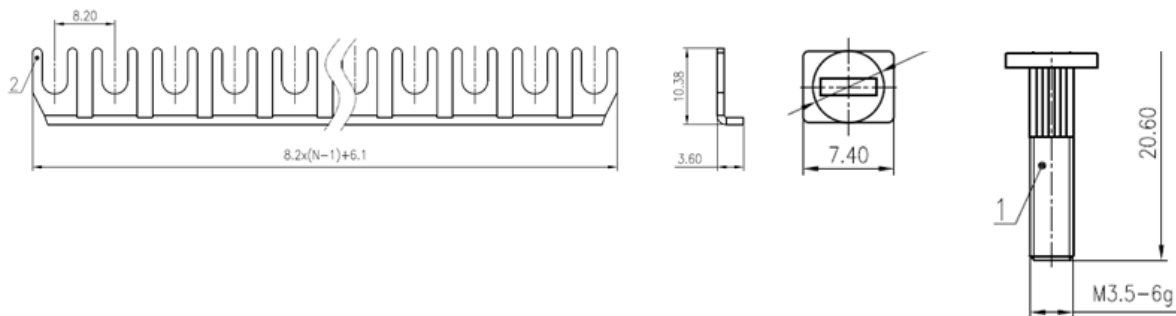Product Dimensions**FB2-RTK/S**

Subject to change without notice