

## Push Buttons

### Specifications

Hole Diameter:	Ø 22mm
Working Environment Temperature:	-25°C - 65°C
Standard Rating:	EN60947-1 : 2004
Rated Insulation Voltage:	300V
Conventional Thermal Current:	5A
Class AC15, Rated Current:	AC120V / AC240V 2.5A
Class DC13, Rated Current:	DC125V / DC24V 0.2A
Contact Resistance:	50mΩ
Protection degree in front of panel:	IP40
Protection degree behind panel:	IP40


### Product Image



### Product Detail

Part No.	Illumination	Colour	Description
PB22-A3-RD	Non-Illuminated	Red	N/O + N/C Spring Return
PB22-A3-GN	Non-Illuminated	Green	N/O + N/C Spring Return
PB22-A3-BL	Non-Illuminated	Blue	N/O + N/C Spring Return
PB22-A3-BK	Non-Illuminated	Black	N/O + N/C Spring Return

### Product Dimensions

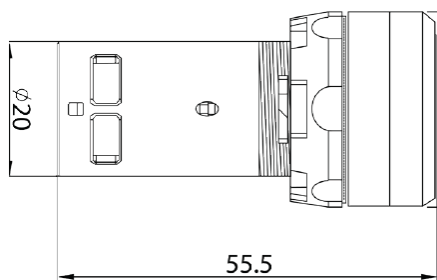

Subject to change without notice