

Pilot Lights

Specifications

Hole Diameter:	Ø 22 mm
Working Environment Temperature:	-25°C - 55°C
Standard Rating:	EN60947-7-1
Rated Insulation Voltage:	660V
Rated operational current Ie:	<20mA
Ingress Protection (rear face):	IP40
Ingress Protection (front face):	IP65
Luminance:	100cd/m ²
Insulation Resistance:	10mΩ
Service Life:	30,000 hours
VA Rating:	24VAC/DC - 0.48VA 220VAC/DC – 4.4VA


Product Images



Product Details

Part No.	Colour	Description
PL22-GN24V	Green	Direct Wire 24V AC/DC
PL22-YW24V	Amber	Direct Wire 24V AC/DC
PL22-RD24V	Red	Direct Wire 24V AC/DC
PL22-BL24V	Blue	Direct Wire 24V AC/DC

Product Dimensions

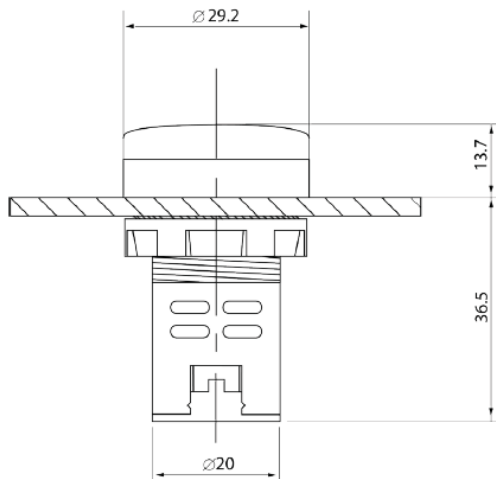

Subject to change without notice