

Loadbreak Switch

Features & Specifications

- Capable of switching electric circuits with load
- Provides function of Isolation
- Rated Current (A): 250
- Rated Voltage: AC 230/400V
- No. Poles: 3
- Rated Frequency: 50/60Hz
- Rated short-circuit making capacity: 3kA
- Rated withstand current: 3kA within 1 Sec
- Electro-mechanical endurance: 10000 cycles
- Connection capacity: Rigid conductor 50mm² and up
- Connection terminal: Extensional busbar
- Installation:
 - DIN rail mount
 - Panel mounting
- Terminal Connection Height: H = 22mm
- Standards: IEC60947-3, RoHS


Product Images




Product Details

Part No.	A	Poles	Watt Loss
DS-250-3P	250	3	56.25 W

Wiring Diagrams

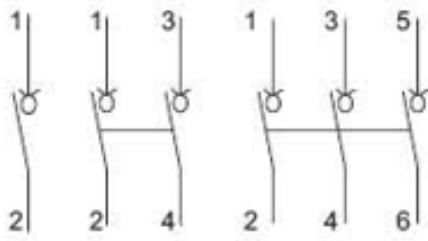

Dimension Diagrams

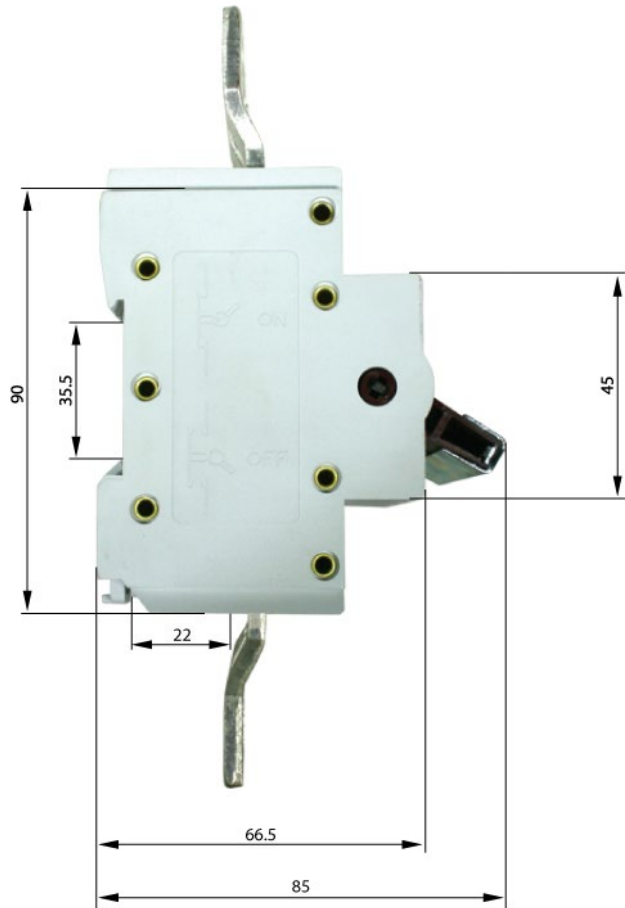

Subject to change without notice