

Pre-Insulated Fork Terminals - Twin Conductor Grip Range


Specifications

- Conductor Material: Copper
- Treatment: Tin plating
- Insulation Material: Vinyl
- Reinforcement sleeve: C type sleeve
- Maximum electrical rating: 75°C 600 volts
- Packet quantity: 100pc

Product Images



Product Details and Dimensions

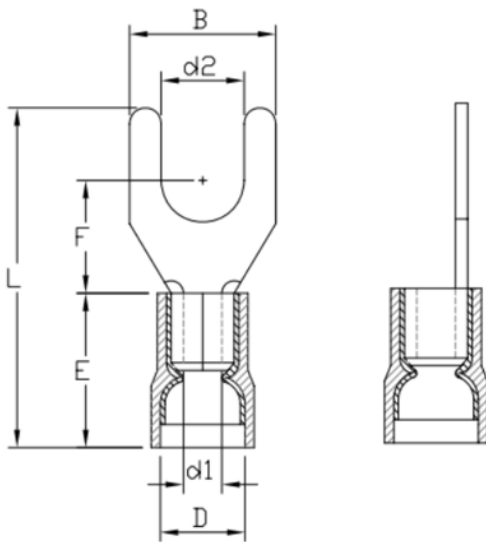

Red

Part No:	Colour	Wire Range (mm ²)	AWG	d2	B	F	L	E	D	d1	thick
IF1-3TG	Red	0.5 – 1.5	22 - 16	3.2	5.8	6.3	21.0	10.0	4.5	1.7	0.75
IF1-4TG	Red	0.5 – 1.5	22 - 16	4.3	7.2	6.3	21.0	10.0	4.5	1.7	0.75
IF1-5TG	Red	0.5 – 1.5	22 - 16	5.3	9.5	7.0	21.0	10.0	4.5	1.7	0.75

Measurements are in mm

Blue

Part No:	Colour	Wire Range (mm ²)	AWG	d2	B	F	L	E	D	d1	thick
IF2-3TG	Blue	1.5 – 2.5	16 - 14	3.2	5.8	6.3	21.0	10.0	5.0	2.3	0.8
IF2-4TG	Blue	1.5 – 2.5	16 - 14	4.3	7.2	6.5	21.2	10.0	5.0	2.3	0.8
IF2-5TG	Blue	1.5 – 2.5	16 - 14	5.3	9.5	7.3	22.0	10.0	5.0	2.3	0.8
IF2-6TG	Blue	1.5 – 2.5	16 - 14	6.5	12.0	11.0	27.2	10.0	5.0	2.3	0.8

Measurements are in mm

Yellow

Part No:	Colour	Wire Range (mm ²)	AWG	d2	B	F	L	E	D	d1	thick
IF5-3.5TG	Yellow	4.0 – 6.0	12 - 10	3.7	8.5	7.5	26.2	13.5	6.8	3.4	1.0
IF5-4TG	Yellow	4.0 – 6.0	12 - 10	4.3	9.5	7.5	26.2	13.5	6.8	3.4	1.0
IF5-5TG	Yellow	4.0 – 6.0	12 - 10	5.3	9.5	7.5	26.2	13.5	6.8	3.4	1.0
IF5-6TG	Yellow	4.0 – 6.0	12 - 10	6.5	12.0	12.0	32.2	13.5	6.8	3.4	1.0

Measurements are in mm

Maximum Electric Current

AWG	22	20	18	16	14	12	10
Max Amp	9	12	17	18	30	35	50

Colour	Red	Blue	Yellow
Wire Range (mm ²)	0.5 - 1.5	1.0 - 2.5	4.0 - 6.0
Fork Terminals	9 - 18 A	18 - 30 A	35 - 50 A

Subject to change without notice