

Pre-Insulated Quick Connectors – Semi Insulated Female


Specifications

- Conductor Material: Brass
- Treatment: Tin plating
- Insulation Material: Vinyl
- Maximum electrical rating: 75°C 300 volts
- Reinforcement Sleeve: C Type sleeve
- Packet quantity: 100pc

Product Image



Product Details and Dimensions

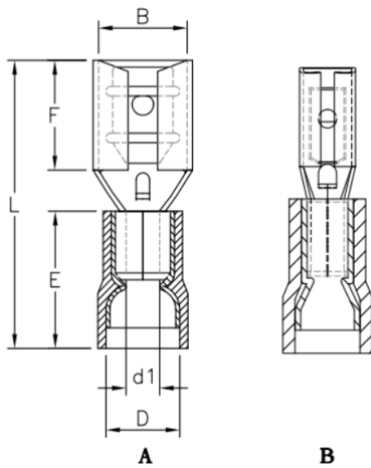

Part No:	Colour	Wire Range (mm ²)	AWG	B	F	L	E	D	d1	thickness
S1QC-2.8	Red	0.5 – 1.5	22 - 16	3.2	6.4	18.5	10	4.3	1.7	0.30
S1QC-4.8	Red	0.5 – 1.5	22 - 16	5.0	6.5	19.0	10	4.3	1.7	0.35
S1QC-6.3	Red	0.5 – 1.5	22 - 16	6.6	7.9	21.0	10	4.3	1.7	0.40
S2QC-2.8	Blue	1.5 – 2.5	16 – 14	3.2	6.4	18.5	10	5.0	2.3	0.30
S2QC-4.8	Blue	1.5 – 2.5	16 – 14	5.0	6.5	19.0	10	5.0	2.3	0.35
S2QC-6.3	Blue	1.5 – 2.5	16 – 14	6.6	7.9	21.0	10	5.0	2.3	0.40
S5QC-6.3	Yellow	4.0 – 6.0	12 - 10	6.6	7.9	24.0	13.5	6.5	3.4	0.40

Measurements are in mm

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

Colour	Red	Blue	Yellow
Wire Range (mm ²)	0.5 - 1.5	1.0 - 2.5	4.0 - 6.0
Quick Connectors	3 - 10 A	10 - 15 A	20 - 24 A

Subject to change without notice