


Isolators

Features & Specifications

- General purpose main isolator
- Red toggle
- DIN or chassis mounting
- 18mm pitch
- Rated Current (A): 63, 125
- Rated Voltage: 240/415VAC
- No. Poles: 3P
- Rated frequency: 50/60 Hz
- Max continues Ampere Temp rating: +55°C
- Connection Torque: 2.5Nm
- Short-circuit resistance with upfront fuses Gg/gL 100A (nominal): 10kA
- Icw: 1.5kA for 1 sec
- Mechanical service life (complete on-off-cycle) AC22B 20,000
- Electrical service life, $\cos \phi = 0.95$, AC 22B 10,000
- Screws Terminal capacity: min 1x6 Sqmm
- Screws Terminal capacity: Max 1x50Sqmm
- Standards: IEC 60947-3

Product Images

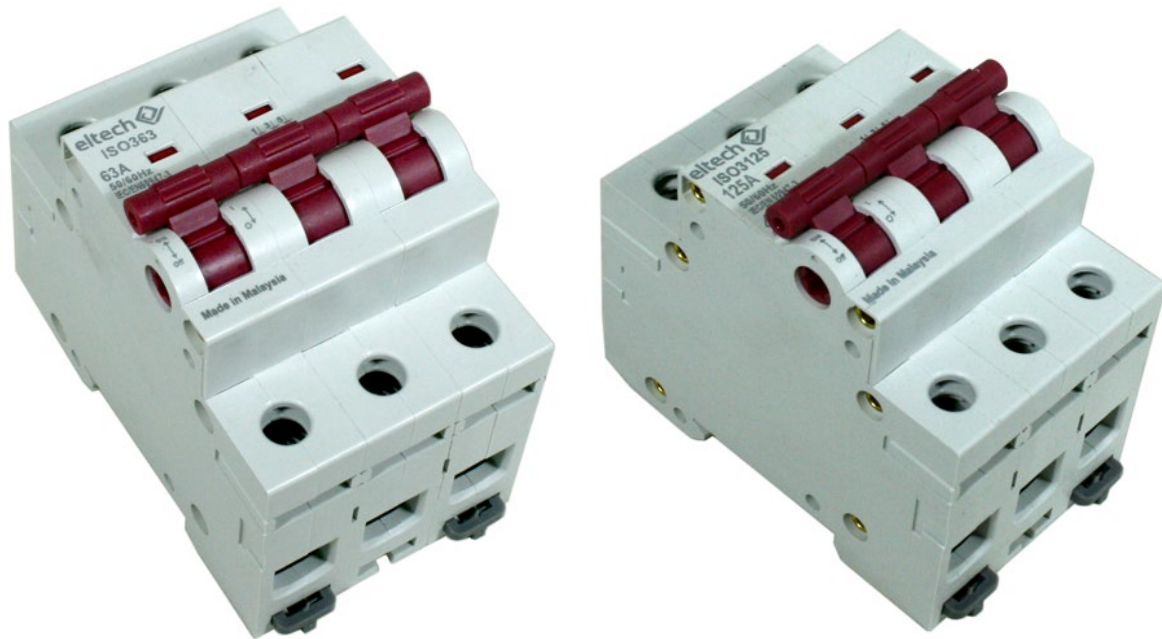

Product Details

Part No.	Current (A)	Poles
ISO363	63A	3 pole
ISO3125	125A	3 pole

Dimension Diagrams

