

Rubber Power Cables - 3C+E


Product Description

Three Core Flexible Rubber Cable Rated at 450/750V, Flexible Plain Annealed Copper Conductors, EPR Insulated, CPE Sheathed to BS EN50525-2-2. Oil and Chemicals resistant, Flame retardant and UV stabilised.

Specifications

Conductor	
Material:	Plain Annealed Copper
Stranding:	Class 5
Standards:	AS/NZS 1125
Insulation	
Material:	EPR/IE4
Operating Temperature:	60°C
Colour:	Brown, Black, Grey and Green/Yellow
Standards:	IEC 60245
Sheath	
Material:	CPE
Operating Temperature:	60°C
IEC Material Designation:	SE4
Colour:	Black
Standards:	IEC 60245
Packaging	Usually Timber Drum - Length as ordered* Plastic Drum for short lengths, usually less than 50mtrs

*MOQ may apply

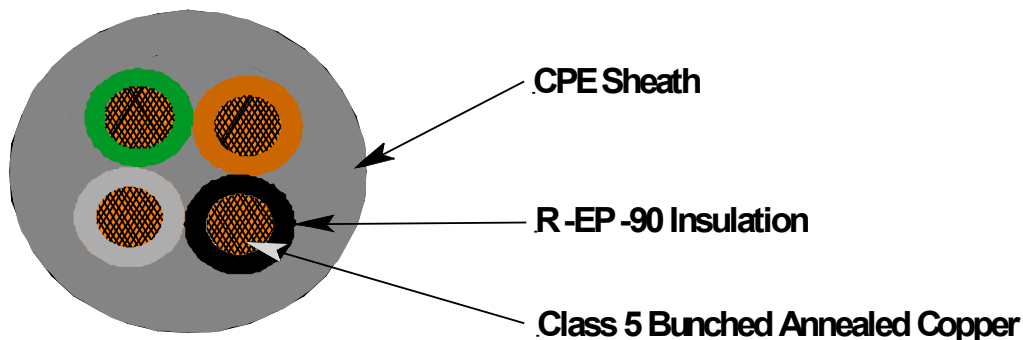

Part No.	No. of Cores	Nom. Area mm ²	Cable O.D. mm	Approx Mass kg/km
EH04G1.0B	3 + E	1.0	11.0	155
EH04G1.5B	3 + E	1.5	12.1	197
EH04G2.5B	3 + E	2.5	14.0	285

Subject to change without notice