

## Instrumentation Cable Multipair Overall Screened - LSZH - Standard Range

### Product Description


Multi Pair, Plain Annealed Copper Conductors, PE Insulated, Overall Screened with an Aluminium/Polyester Laminated Tape with a Tinned Annealed Copper Drain Wire, LSZH Sheathed, UV resistant, Instrumentation Cable

### Specifications

Conductor	
Material:	Plain Annealed Copper
Stranding:	Class 2
Standards:	AS/NZS 1125
Insulation	
Material:	PE
Operating Temperature:	70°C
Colour:	Black with white numbered cores White with black numbered cores
Standards:	AS/NZS 3808
Sheath	
Material:	HFS-90-TP (LSZH)
Operating Temperature:	90°C
Colour:	Black (UV resistant)
Standards:	AS/NZS 3808
Voltage:	300/500V

\*MOQ may apply

### Product Images

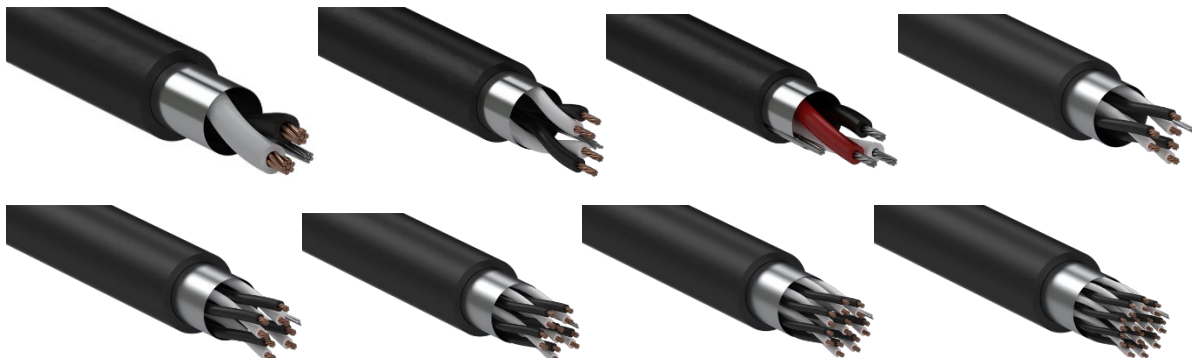

**Product Details**

Part No.	No. Of Pairs	Nom. Area mm <sup>2</sup>	Cable O.D. mm	Stranding No./mm	Approx Mass kg/km
ELT7301P-ENV	1	0.5	5.3	7/0.30	28
ELT7302P-ENV	2	0.5	7.5	7/0.30	51
ELT7303-ENV	3 Core	0.5	5.8	7/0.30	35
ELT7303P-ENV	3	0.5	8.3	7/0.30	69
ELT7304P-ENV	4	0.5	9.8	7/0.30	85
ELT7306P-ENV	6	0.5	11.6	7/0.30	121
ELT7308P-ENV	8	0.5	12.8	7/0.30	162
ELT7310P-ENV	10	0.5	15.0	7/0.30	203
ELT7312P-ENV	12	0.5	15.8	7/0.30	230
ELT7401P-ENV	1	0.88 (1.0)	6.0	7/0.40	41
ELT7402P-ENV	2	0.88 (1.0)	8.7	7/0.40	75
ELT7403P-ENV	3	0.88 (1.0)	10.0	7/0.40	102
ELT7501P-ENV	1	1.5	7.0	7/0.50	53
ELT7502P-ENV	2	1.5	10.8	7/0.50	103
ELT7503P-ENV	3	1.5	11.7	7/0.50	141



Subject to change without notice