

Dektites Premium #1

- DEKS
- Colour: Black
- Suits 5 – 55mm Penetrations
- Aluminium base that can be formed to suit your roof profile
- Provides good contact with flashed pipe providing a watertight seal
- IAPMO, PS64-12, ASTMG154, ASTMD7238, UPC, AS1530.80.1
- BAL 12.5 (Black)
- UV Tested

Product Details

Part No.	Colour	Penetration Size	Base Size	Working Temperature	Roof Pitch	Materials
DFE101B	Black	5-55mm	139 x 139mm	-50°C – 115°C	0-45°	EPDM/Aluminium



Product Images



Technical Specifications

Property	Conditions	Method	Requirements As per IAPMO PS 64 -12	Result
Ultimate Elongation of Rubber	Die C	ASTM D412	Min. 210 % Elongation	Complies
Split Tear Strength of Rubber	Die C	ASTM D624	Min. 0.25 kN/m (EPDM), Min. 0.17 kN/m (Silicone)	Complies
Water Absorption of Rubber	48 hrs @ 158°F	ASTM D471	Max. change 5% by volume	Complies
Ozone Resistance of Rubber	72 hrs @ 104°F & 50 pphm Ozone	ASTM D1149 and D1171	No visible cracks	Complies
Low Temp. Brittleness of Rubber	Non-brittle 3 minutes @ -40°F, Method A	ASTM D2137	No brittleness	Complies
UV resistance of Rubber	UV: One cycle of 4 hrs @ 140°F. Condensation: 2000 hrs @ 122°F	ASTM G154	Max. 50% loss in Tensile Strength & Elongation	Complies
Rain Test for Flashing	Section 25	ANSI/UL 441	Pass	Complies
Temperature Test of Flashing	Section 19	ANSI/UL 441	Max. 90°F above the room temp.	Complies
Horizontal Burning Test / Flame spread of Flashing	Section 7	UL 94	Max. 75 mm/min	Complies

Product Dimensions

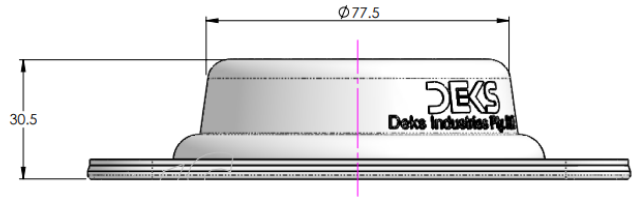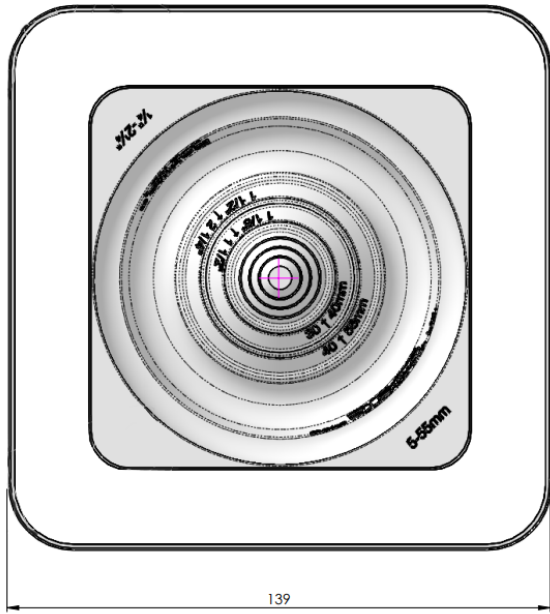

Subject to change without notice