
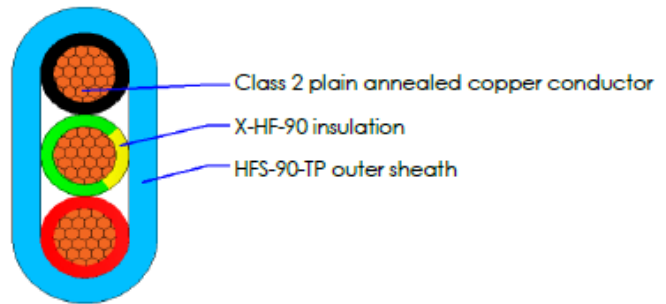


TPS Cable - LSZH

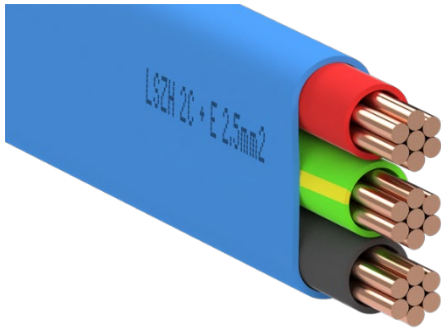

Product Description

TPS Cable 2C + E 2.5mm – Blue Sheath

Electrical Characteristics

- Rated Voltage: 450/750V
- Conductor operating temperature range: -20°C ~ 90°C

Standards

- Design guidelines: AS/NZS 5000.2
- Conductor: AS/NZS 1125
- Insulation and sheath: AS/NZS 3808

Outer Sheath: Blue

Core Colour: Red, Black, Green/Yellow

Specifications

Conductor	
Material:	Plain Copper
Stranding:	Class 2
Standards:	AS/NZS 1125
Insulation/Sheath	
Material:	Insulation - X-HF-90 Sheath - HFS-90-TP
Operating Temperature:	Min & Max operating temp -20°C & 90°C
Colour:	Blue
Standards:	AS/NZS 3808

Technical Data

Part No.	No. of Cores & CSA	Structure of Conductor		Approx Overall dia.	Approx Mass	Max DC Resistance of conductor at 20C		Max. allowable pulling force of conductor	Min Bending Radius
		Phase	Earth			Phase	Earth		
		No./mm	No./mm	mm	Kg/K m	Ω/km	Ω/km	kN	mm
ELT2025ETPS-ENV	2C2.5+E2.5	7/0.68	7/0.68	5.2x 11.7	136	7.41	7.41	0.51	21



Subject to change without notice