


Copper Crimp Links

Specifications

- Material: Tinned Copper
- Final Metal State: Fully Annealed
- Complies with AS4325.1

Product Image

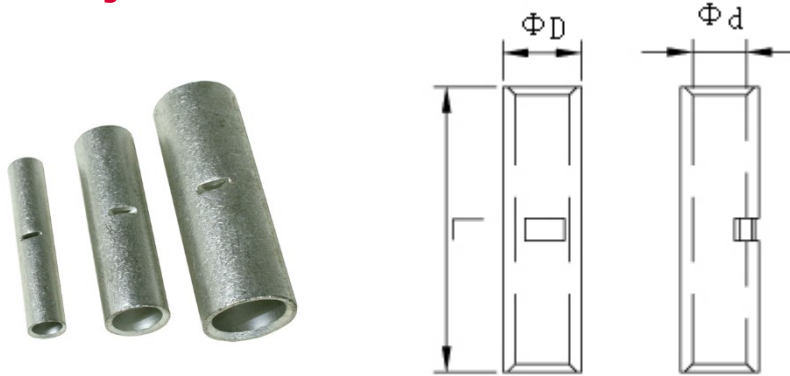

Product Details and Dimensions

| Part No: | Cable size (mm ²) | Ø D (mm) | Ø d (mm) | L (mm) |
|----------|-------------------------------|----------|----------|--------|
| CL1.5 | 1.5 | 3.7 | 1.8 | 20.0 |
| CL2.5 | 2.5 | 4.0 | 2.4 | 20.0 |
| CL4 | 4 | 4.8 | 3.1 | 20.0 |
| CL6 | 6 | 5.5 | 3.8 | 20.0 |
| CL10 | 10 | 6.2 | 4.5 | 20.0 |
| CL16 | 16 | 7.1 | 5.4 | 40.0 |
| CL25 | 25 | 8.8 | 6.8 | 45.0 |
| CL35 | 35 | 10.6 | 8.2 | 45.0 |
| CL50 | 50 | 12.4 | 9.5 | 45.0 |
| CL70 | 70 | 14.7 | 11.2 | 50.0 |
| CL95 | 95 | 17.4 | 13.5 | 50.0 |
| CL120 | 120 | 19.4 | 15.0 | 55.0 |
| CL150 | 150 | 21.2 | 16.5 | 60.0 |
| CL185 | 185 | 23.5 | 18.5 | 65.0 |
| CL240 | 240 | 26.5 | 21.0 | 80.0 |
| CL300 | 300 | 30.0 | 23.5 | 85.0 |
| CL400 | 400 | 36.5 | 28.5 | 90.0 |
| CL500 | 500 | 39.0 | 30.0 | 100.0 |
| CL630 | 630 | 45.0 | 35.0 | 110.0 |

Subject to change without notice